


MANUAL V5.0

Please check regularly for updated versions of this manual on slacktivity.com

«seaHorse-1.5»

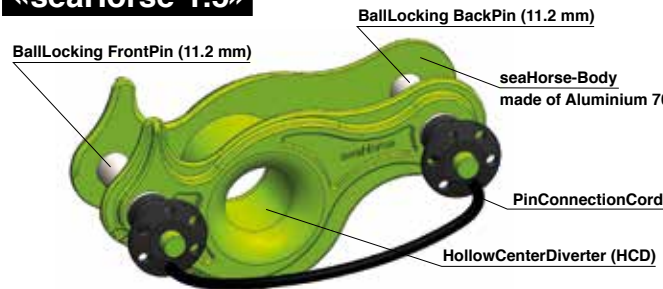

Weight: 263g

WLL: 12kN / MBS: 70kN
For slackline webbings
» of Polyester/Polyamid/UHMWPE
» 25-27mm width
» up to 8mm thickness

Markings In highlining there is a potential risk of accident, severe injury or death. Therefore this product must only be used by trained or otherwise competent persons or people that are under direct supervision and visual control of such a person.

Before using this equipment, you must read and understand all instructions for Use.




1. Area of application

The seaHorse is a weblock for fixation of slackline webbings in slackline-systems and highlines.

The seaHorse is approved for the single and double wrap method.

Use only ISA:41 approved webbing for highline applications.

2. How to setup

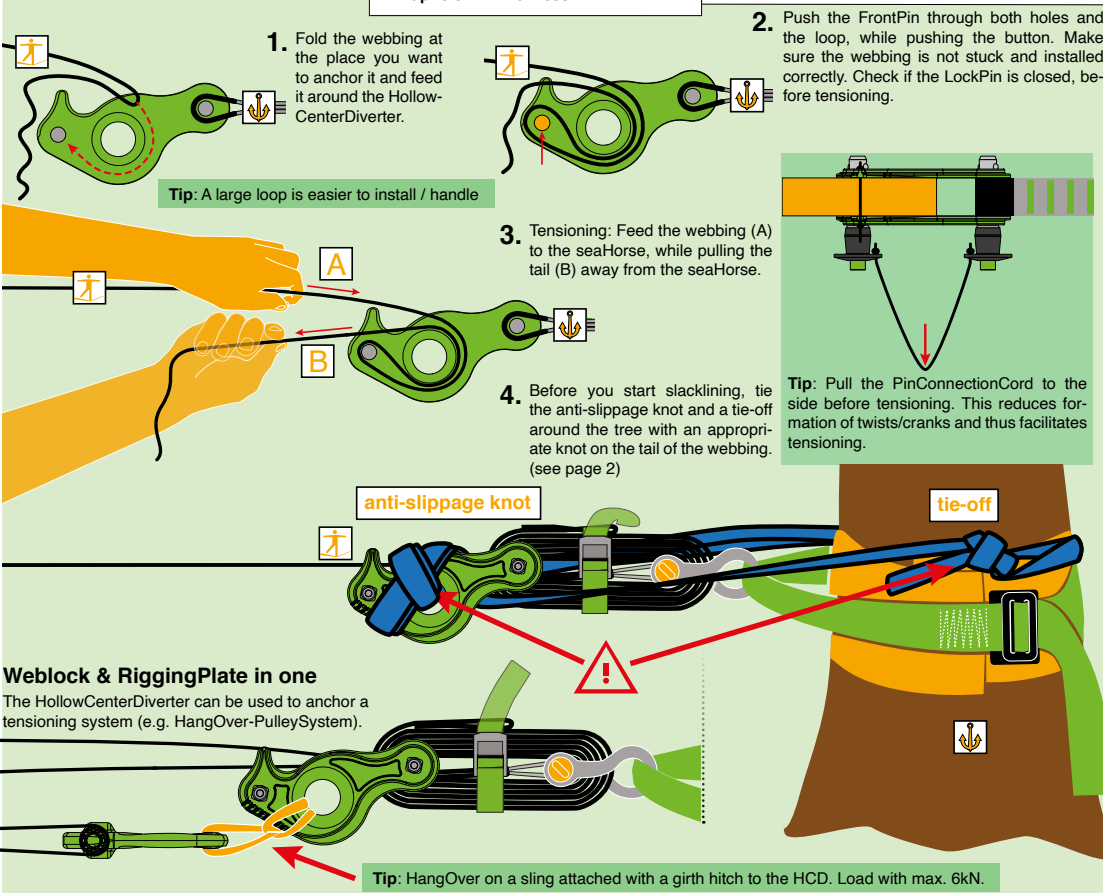


3. Warnings


Only the displayed connection elements are allowed to use with the seaHorse

Allgemeiner Hinweis

Carabiners (according to EN 362 or EN 12275) are not approved for highline use. Exception is the use of carabiners for tie-off and backup.

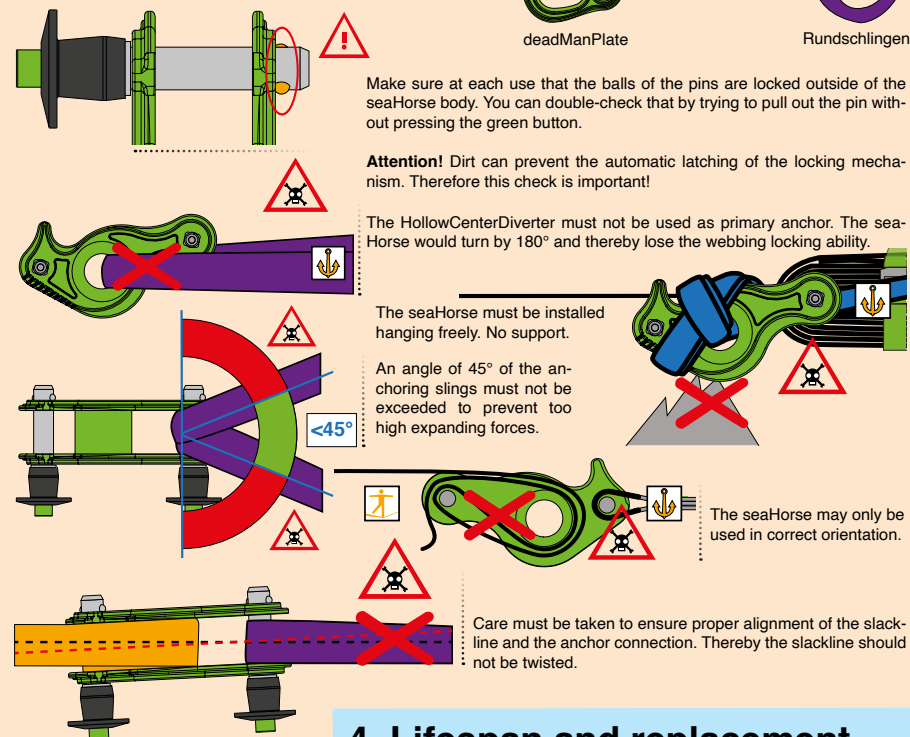

4. Lifespan and replacement

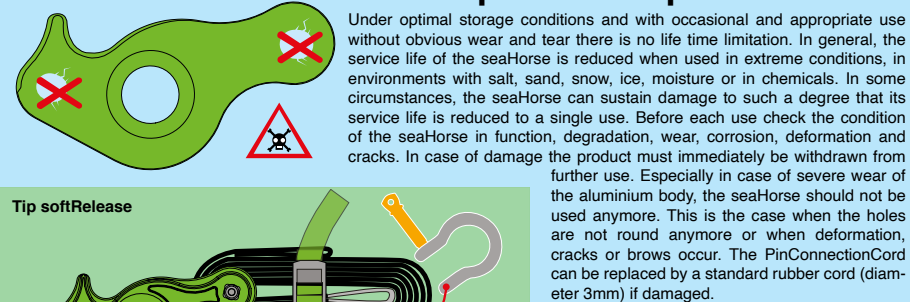


Transportation and storing


The product must be stored dry and protected from light, separated from sharp objects, acids, bases & solvents.

© by SLACKTIVITY


4. Anti-slippage knot & tie-off

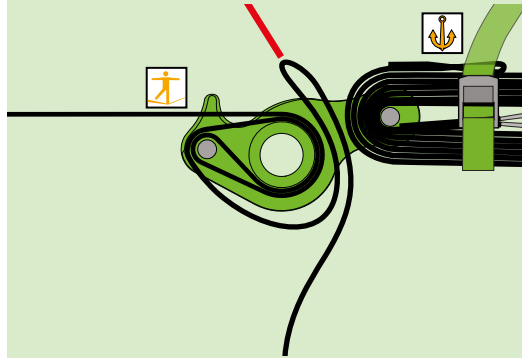


4.1 Put the folded tail coming out of the seaHorse in between the BackPin and the HollowCenterDiverter. Make sure that the webbing is straight and not twisted.

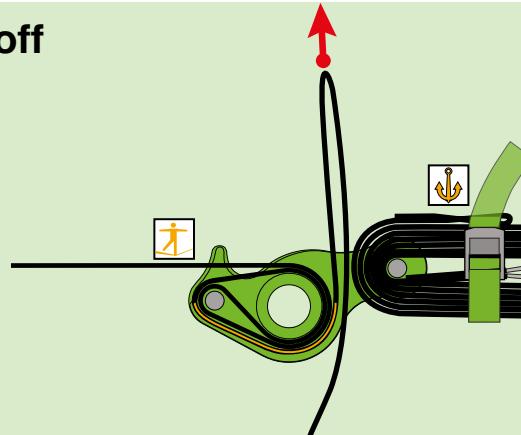


4.2 Pull through enough webbing to wrap around the seaHorse and the tie-off later. Make sure that the line is tight against the HollowCenterDiverter.

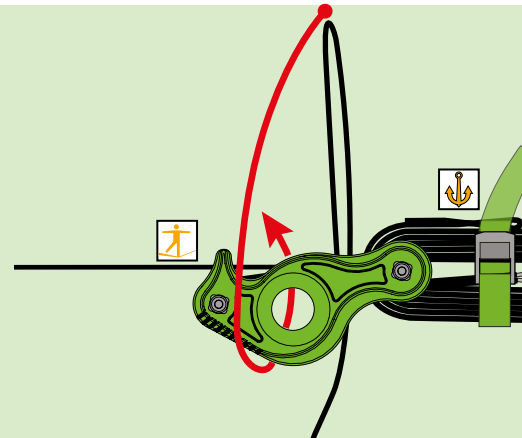

4.3 Wrap the tail of the webbing around the seaHorse (in between the FrontPin and the HollowCenterDiverter). Which direction to wrap around doesn't matter.

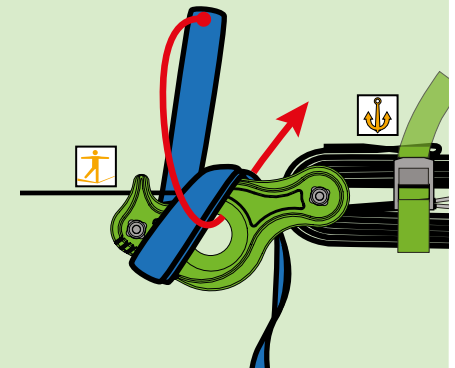


4.4 Now put the tail of the webbing into the HollowCenterDiverter in a way that the webbings are crossing once.

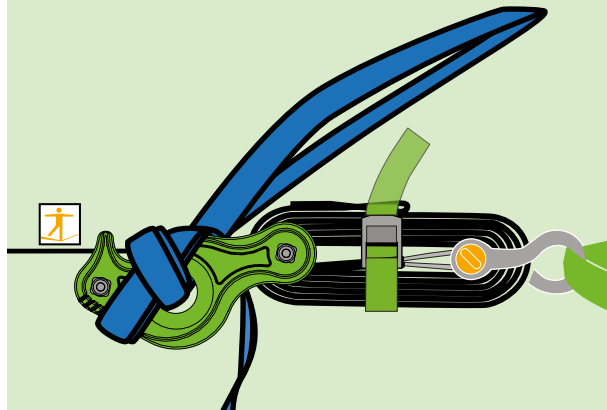

4.5 Pull the knot tight around the seaHorse. Make sure the webbing is nicely on top of one another and not twisted.

4.6 You can tie-off the seaHorse in multiple ways (for example A+B).

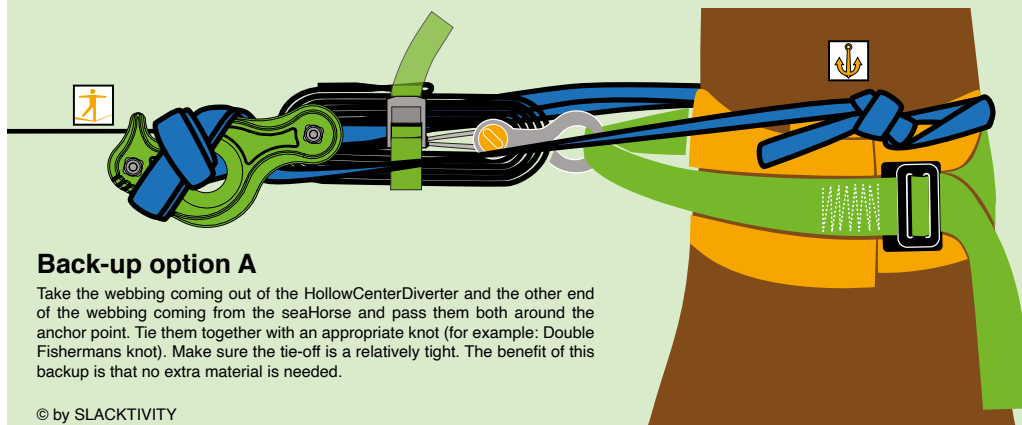

Back-up option A

Take the webbing coming out of the HollowCenterDiverter and the other end of the webbing coming from the seaHorse and pass them both around the anchor point. Tie them together with an appropriate knot (for example: Double Fishermans knot). Make sure the tie-off is a relatively tight. The benefit of this backup is that no extra material is needed.

© by SLACKTIVITY




Webbing-Slippage & Tail-Walk

With low tension slacklines (common in highlines) micro slippage might occur. This means the webbing slips millimeter by millimeter out of the weblock. This is not a malfunction, but a consequence of how the weblock is built. The anti-slippage knot and the tie-off demonstrates in the video and this manual completely stops this micro slippage on most lines. With very slippery webbing it's at least minimized and will be stopped when the tie-off is tensioned. **Most important the anti-slippage knot prevents any tail misalignment caused by slippage of the weblock.** Tail misalignment by tail-walking could lead to complete failure of locking the webbing. Be sure to always tie-off your weblock/webbing so that your line will always stay connected to the anchor point.



<https://youtu.be/z3smBHxE7bl>

More information about micro slippage and tail-walking and the tutorial "How to tie-off the seaHorse" can be found in this video.

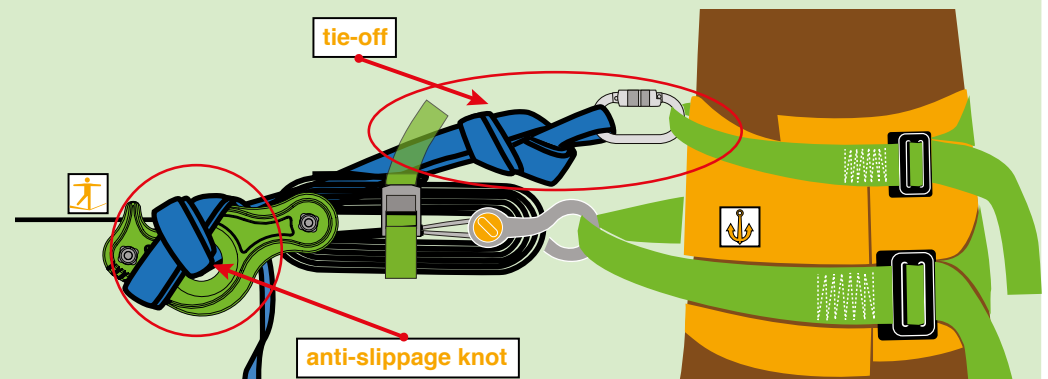

Back-up option B

Make a Figure-8-knot (or double fig. 8) with the webbing coming out of the HollowCenterDiverter and connect it with an additional carabiner or shackle to a separate sling/anchorpoint.

The benefit of this tie-off is that it is easy to check and easy to tie.

Do not forget!

Before you release the softRelease, untie your tie-off.

Additional Informations

Developed & designed by SLACKTIVITY Switzerland manufactured in Taiwan

Please report incidents and accidents with slacklines on this URL: sair.slacklineinternational.org

Contact

SLACKTIVITY.CH Ltd.
Dörfli 2, 8765 Engi, Switzerland
Phone: +41 77 408 03 57
Email: info@slacktivity.ch
URL: www.slacktivity.com